









()
 (-)
 (VDE 700 15)
 >2

2E4	
()	< 100 (1 A 12)
()	> 100 (500)
250 PTI	
	-20 °C ... +100 °C -20 °C ... +55 °C
UL 94 V-2	
	850 °C
PA	
PA	
Cu CuZn	()
80	
/ ■	
	II




1656 -


10 A 250 (.)


		/	10 A 250 (.) 1E4	10 A 250 (.) 1/2 HP	10 A 125 (.) 1/3 HP					
/ (SPST)										
1656.1702	230		*	*			4.8	3	Ag	
1656.1703	230		*	*			4.8	3	Ag	
1656.1723	90				*		4.8	3	Ag	< 90




1656

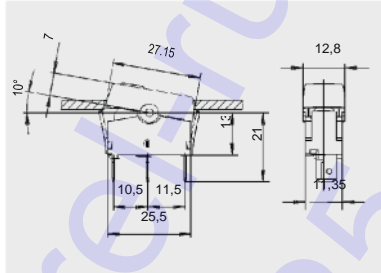

 .4,8 x .0,8



X	Y	*
2	28	13

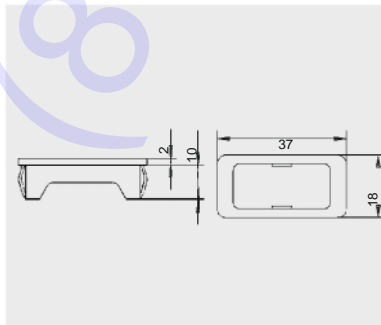

203.007.013 -
217.313.041 -