






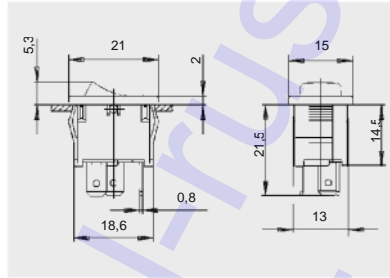
	75E3
	3 N
()	< 100 (1 A 12)
()	> 100 (500)
	250 PTI
	IP 40
	-20 °C ... +100 °C
	-20 °C ... +55 °C
	UL 94 (: V-2, : V-0)
	850 °C
	PA
	PA
	80
	II




		/		6 (4) A 250				
/	(SPST)							
1890.1104	24			*	 4.8	3	Ag	



1890



4,8 x 0,8



X	Y	*
0,75 ... 1,25	19,2 ^{-0.1}	12,9 ^{+0.1}
1,25 ... 2	19,4 ^{-0.1}	12,9 ^{+0.1}
2 ... 3	19,8 ^{-0.1}	12,9 ^{+0.1}



203.089.011

