





```
125
                           W):
                                   3A
                                            0.4
                            G):
                                                                                                 28
                                                   0.1
                                                         ~ 0.1A
                                                                             20 ~ 28 )
                                   (
                                   A):
                                                               W G
                                           20
                                                                   30
                                           1 000
                                                                             500
                                                               1000
                                                               1500
                                                                                                      1
                                           200 000
                                           25 000
                                                                           100 000
                                                              3.92
                                              2.45 ;
                                              0.6
                                                                0.4 ;
                                                                            1.0
                                                                    (UL94V-0)
                                                                                     G);
                                                                    W);
       G);
                                      -30°C
                                             +85°C
                                   90 ~ 95%
                                                 100
                                                             40°C
                                   10 ~ 55
                                                                    1.5
                                            50 G (490 / 2) (
                                                                                                , 5
                                   1.5
                                                          ; 0.7
                                                             80
                                              В
                                         UL94V-0
             UL C-UL:
1R<sub>a</sub>
                                             125 , 0.4
                                                                                         28 ; UL
                                                                                         "/U"
                                   WOYR2.E44145,
                                                               UL
                                                                      "/C-UL"
                                                                                                          C-
                                   C-UL No. WOYR2.E44145;
                                   UL
              CSA:
                                                                            3A
                                                                                125 ( .)
                                                                                 0.4
" SA"
                                       0.4
                                                                          28 ;
                                          28 ; CSA
                                                           No. 023535-0-000; 1
```



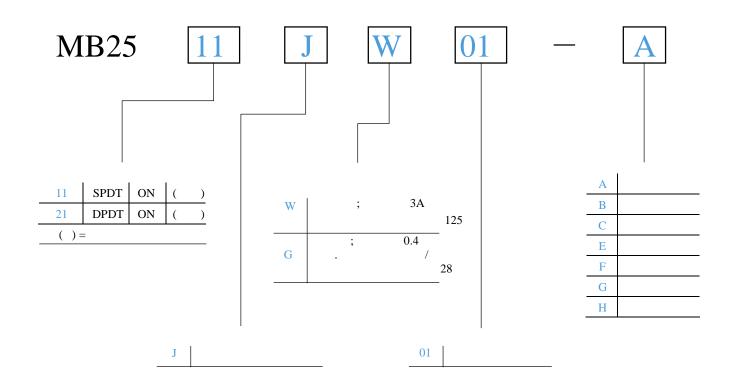


CSA, UL, C-UL


MB2511JW01-A

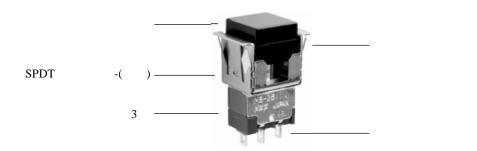




		()=					
		•					:
SP	MB2511		()	3-1	3-2	SPDT	3 (COM) 1 2
DP	MB2521		()	3-1 6-4	3-2 6-5	DPDT	3 (COM) 6 1 2 4 5











3A 125 (.)




0.4 . 28 (/) .

01






















(18,0) .709









MB2521JW01-C









: : ;


AT207






A	(12.5) .492"	(13.1) .516


AT208 AT070 LED : :






A	(12.5) .492"	(13.1) .516
В	(6.25) .246"	(6.55) .258


AT212 AT617 LED :





A	(18.4) .724"	(18.7) .736



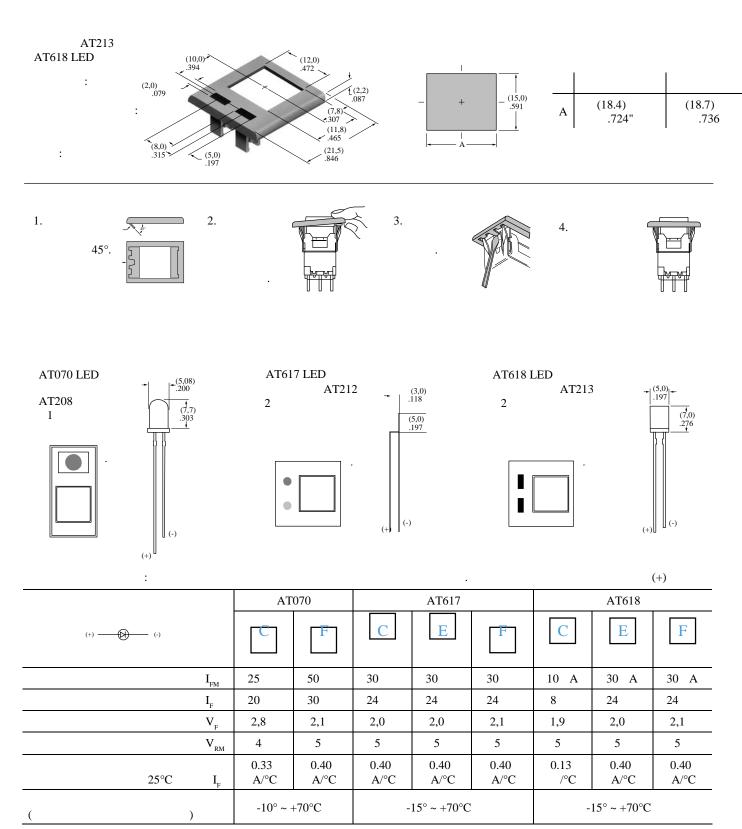

25°C.