

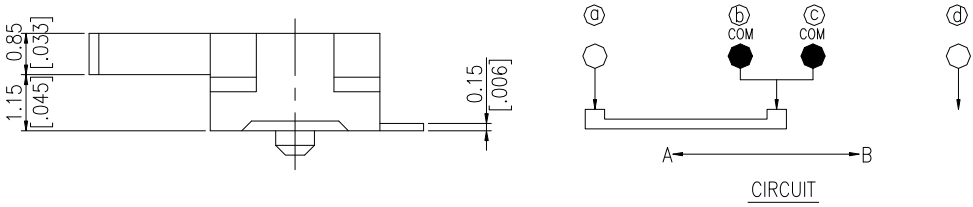


SSS SERIES

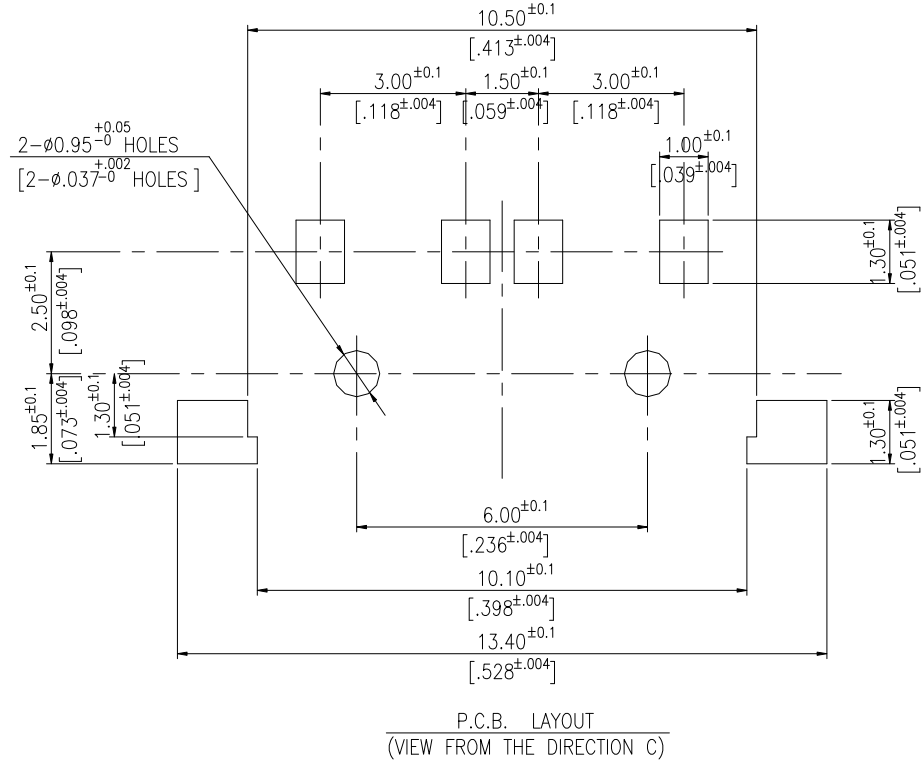




DIMENSION

SSS12L

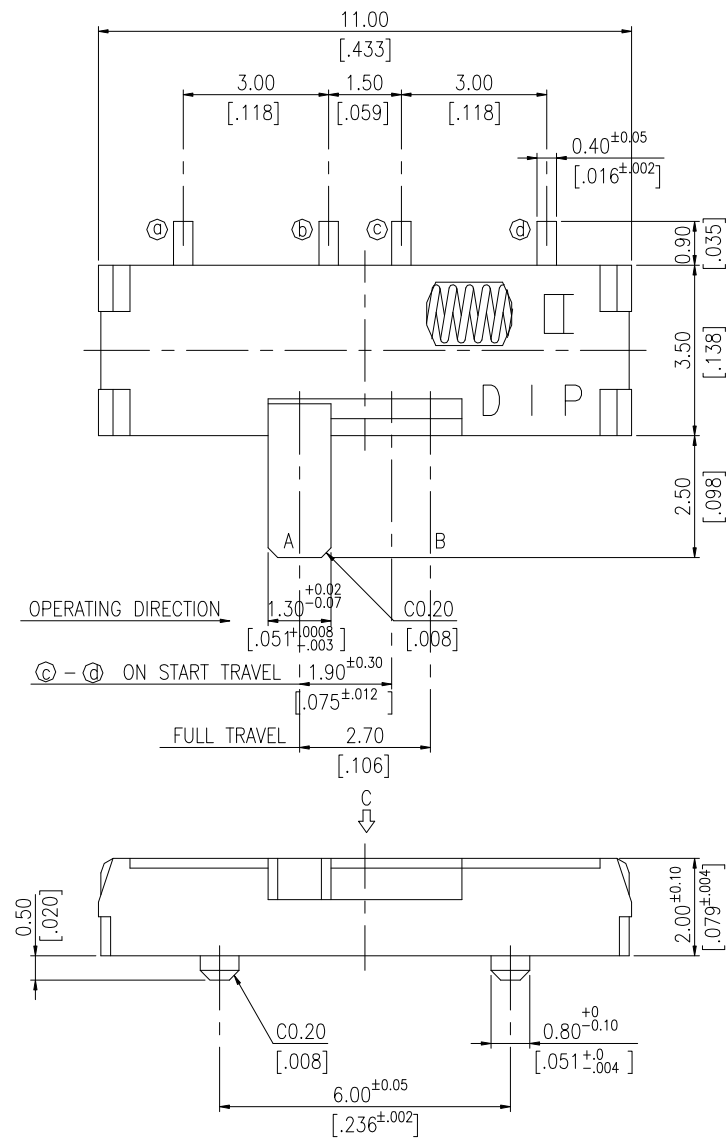




General Tolerance : $\pm 0.2\text{mm}$

SSS12R

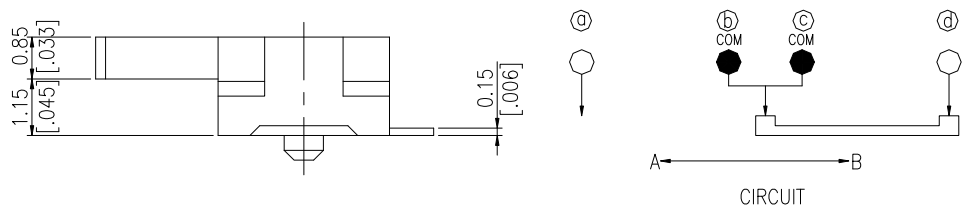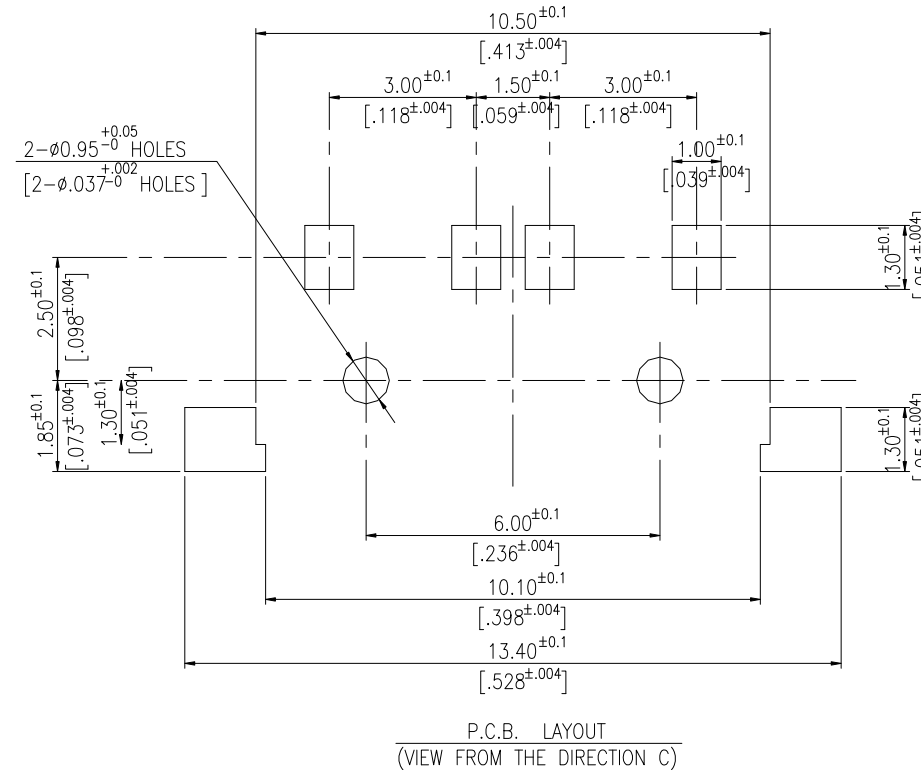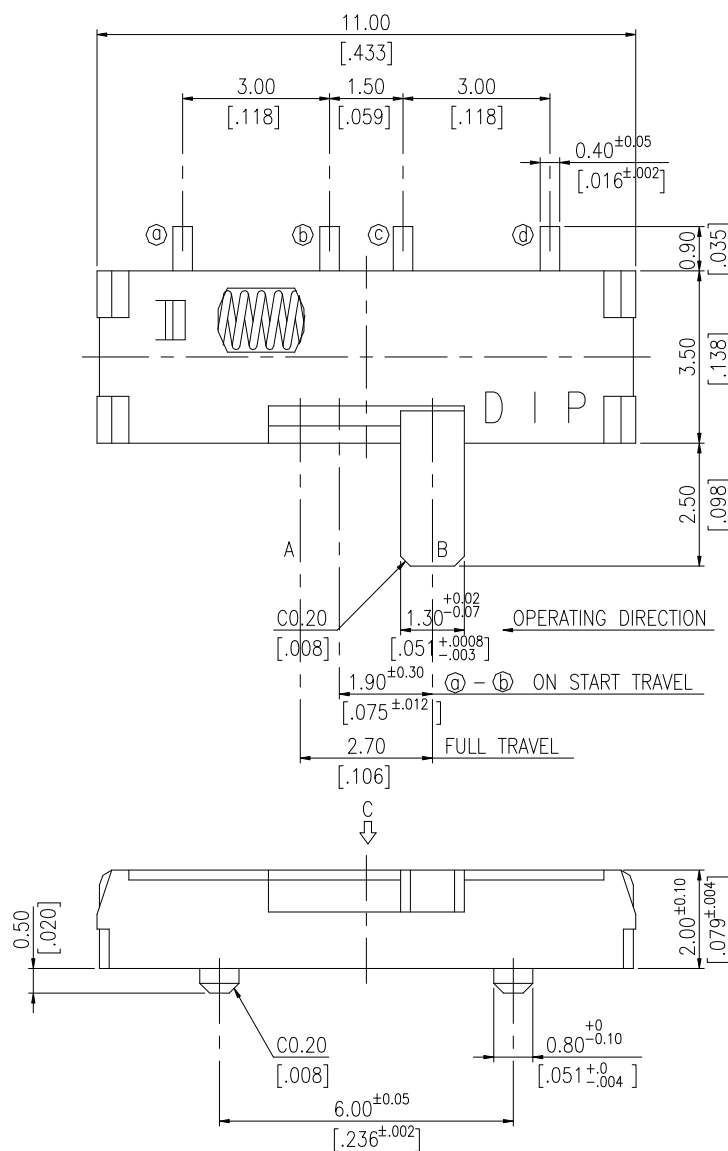




General Tolerance : $\pm 0.2\text{mm}$

SSS12LG

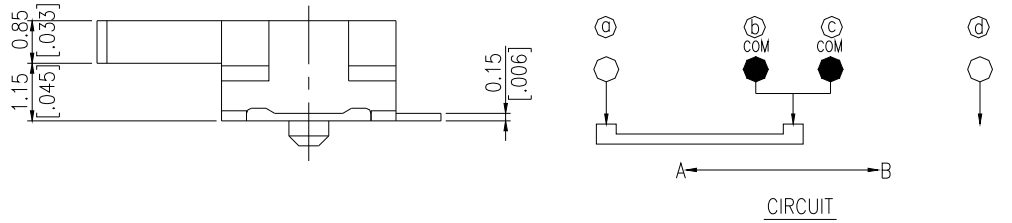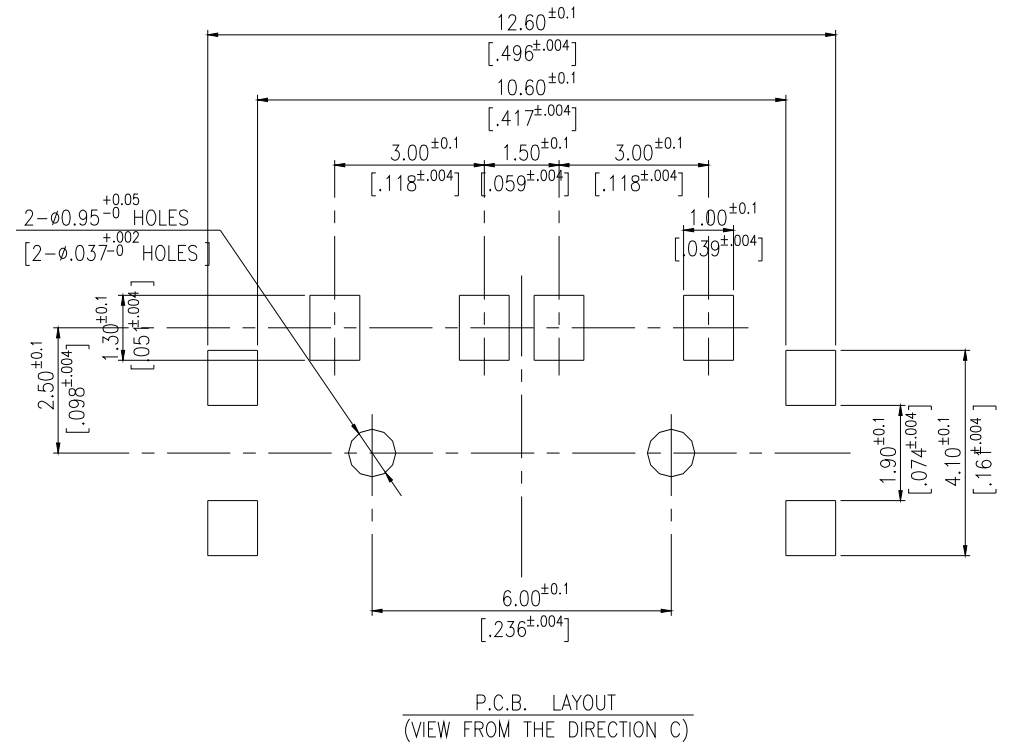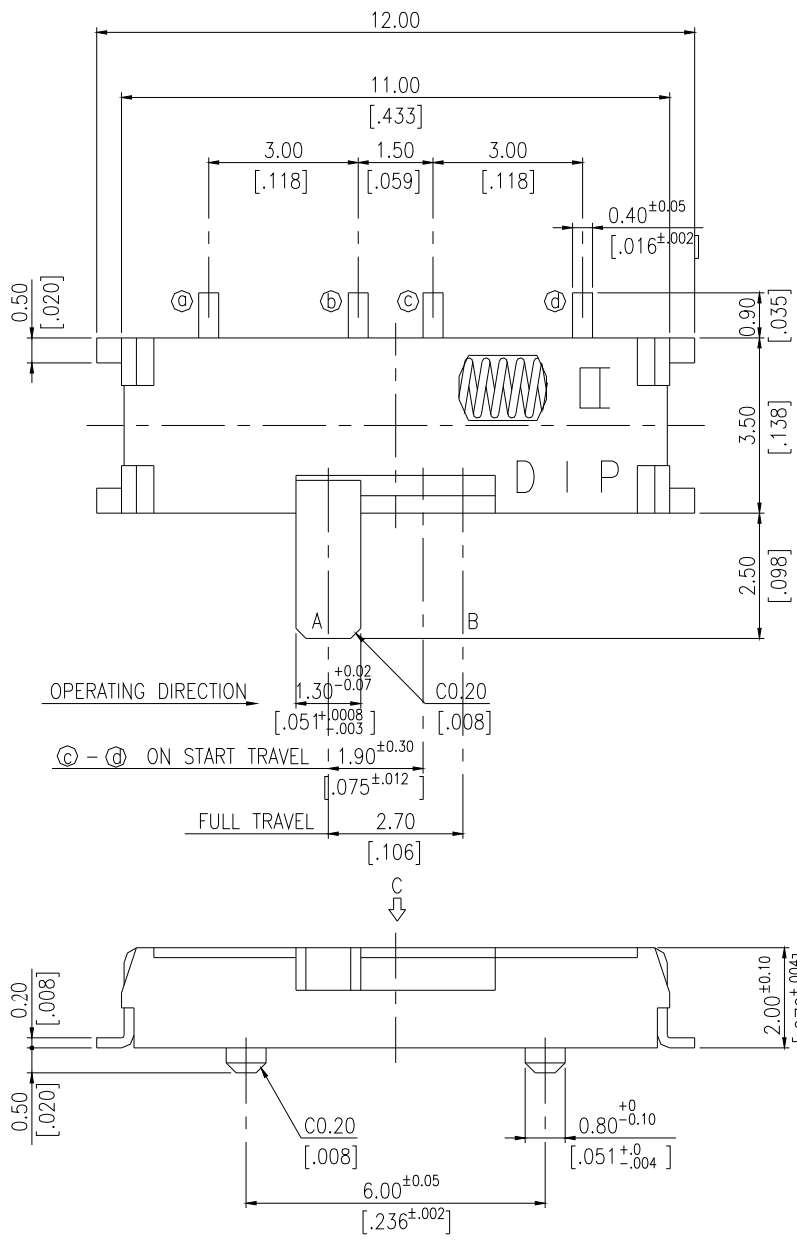

General Tolerance : ±0.2mm

SSS12RG

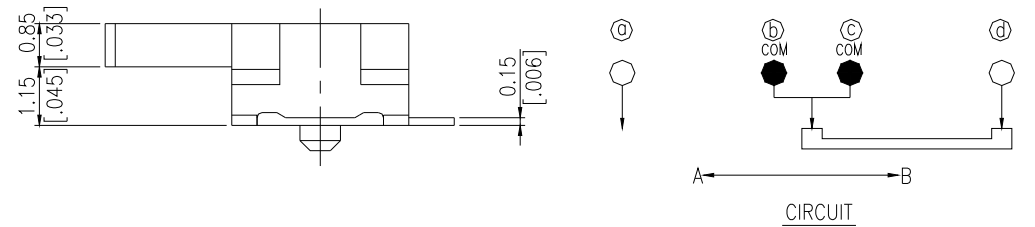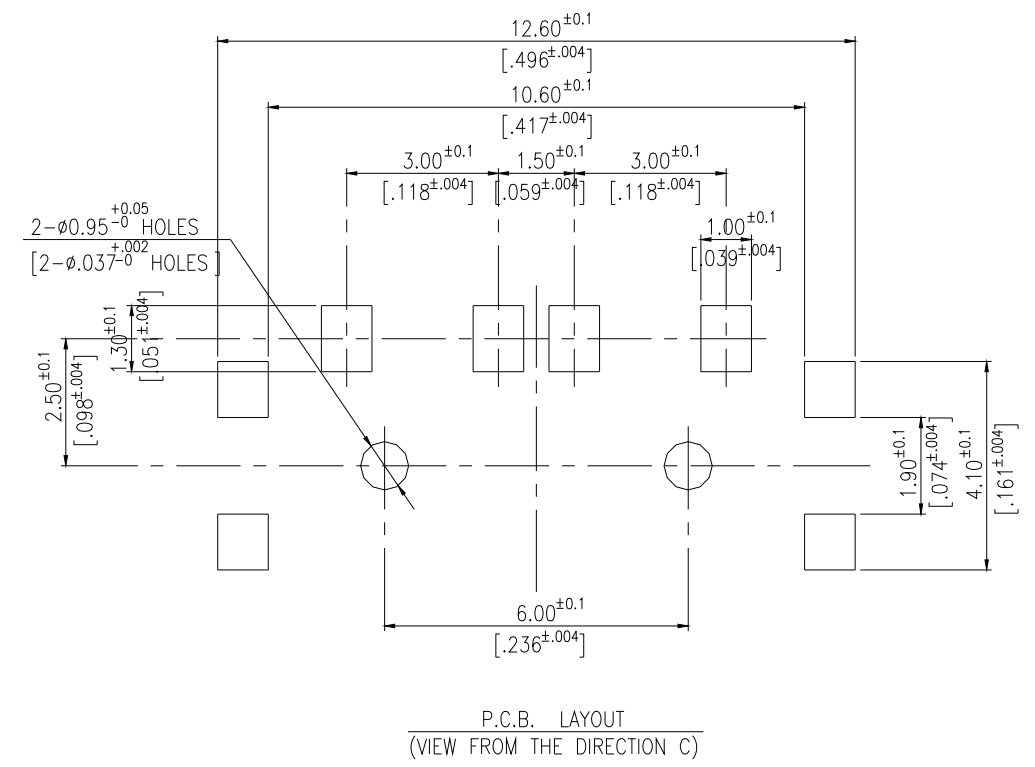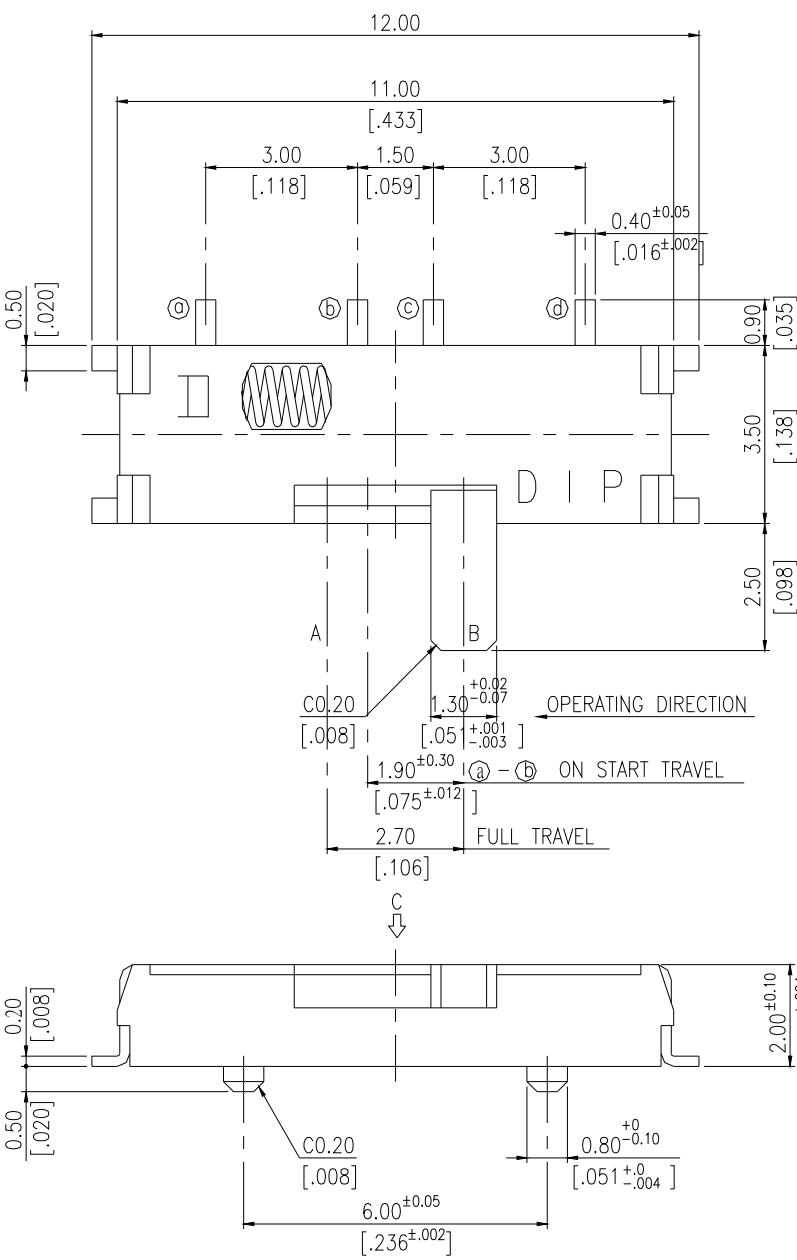

General Tolerance : ±0.2mm

HOW TO ORDER

SSS - 12 □ □ - □ - □

Package :
T/R = Tape & Reel

Soldering :
V = Lead Free Solderable
Q = Halogen Free

□ = Without Ground Terminal
G = Ground Terminal

L = Actuator in Left Side
R = Actuator in Right Side

Poles-Positions
12 = 1P2T

Spring Return Slide Switch

SPECIFICATION

△MECHANICAL

Operation Force : 180±70gf
Operation Temperature Range : -10°C to +60°C
Storage Temperature Range : -20°C to +75°C
Stroke : 2.7mm

△ELECTRICAL

Electrical Life : 10,000 cycles
Rating : 0.3A, 4V DC
Contact Resistance : 70mΩ max.
Insulation Resistance : 100MΩ min. at 100V DC
Dielectric Strength : 100V AC/1 minute
Circuit : 1P2T

MATERIAL


△STEM : Nylon UL94V-0 High-Temp Thermoplastic
Color : Black
△COVER : Nickel silver
△SPRING : Stainless silver
△CONTACT : Alloy Copper, Gold Plated
△BASE : LCP High-Temp Thermoplastic
Color : Black
△TERMINAL : Phosphor Bronze, with Silver plated

SOLDERING PROCESS

△HAND SOLDERING : Use a soldering iron of 30 watts,
Controlled at 350°C approximately 5 seconds while
applying solder.

△REFLOW SOLDERING : When applying reflow soldering,
the peak temperature or the reflow oven should be set
to 260°C max.


△Temperature Profile :

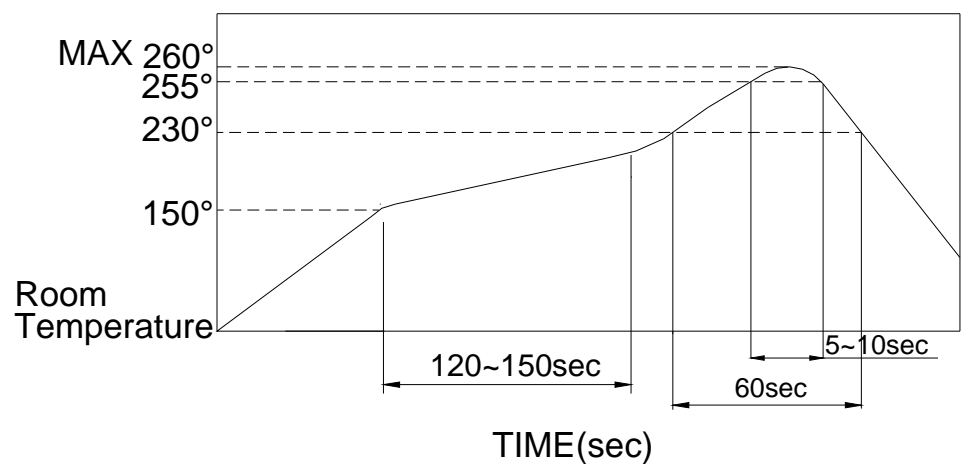

PACKING

REEL

Part Number	Number Per Tube	Number Per Reel
SSS-12R(G)	-	2000
SSS-12L(G)	-	2000

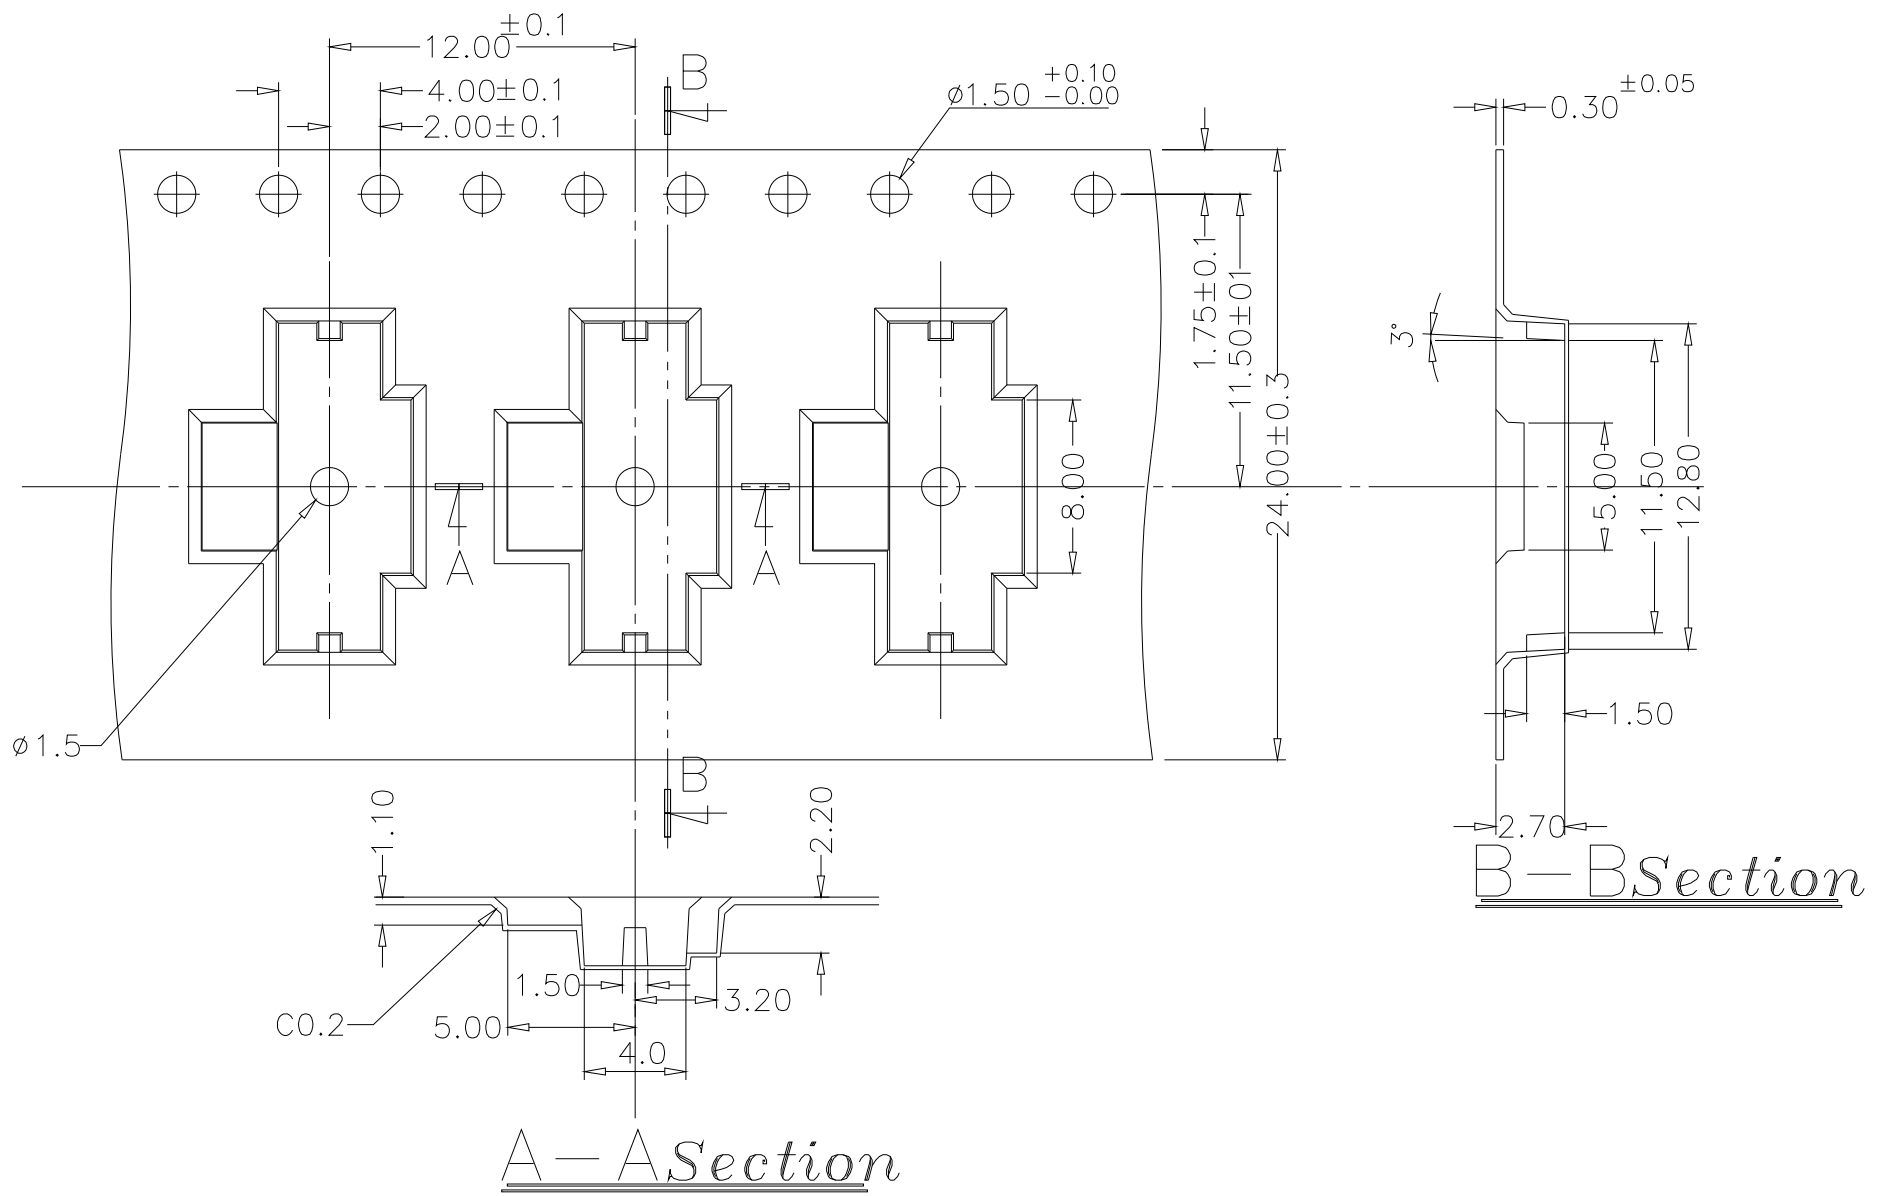

General Tolerance : ± 0.1 mm